




GW150 FIBERGLASS TAPE

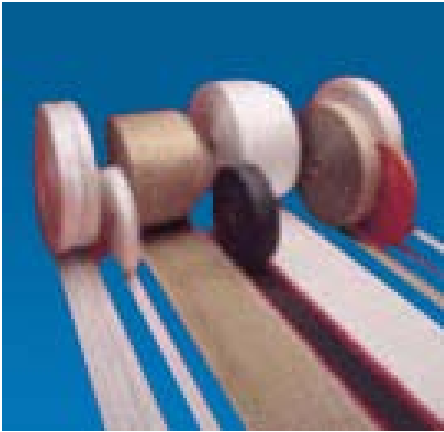

This Fiberglass tape is intended for use in insulation applications or as a low pressure sealing element, where thermal conditions are relatively severe. The use of a tape is particularly useful for large size flanges or complicated shapes. The tape is woven from “E” glass, highly texturized continuous filament, Silica based (56%) yarn. Totally free from any asbestos.

PROPERTIES	
Construction	Plain weave
Weave	Plain
Thickness	0.060”
Available size	1/2” to 6”
Upper use temperature	1000° F (535°C) Continuous
Glass softening point	1470°F (765°C)